


■ 消声器Silencer

PS/AN/一字型ANL系列 PS/AN/"—"/ANL Series

PSC 系列节流消声器


PSC Series Brass Flow Control Silencer

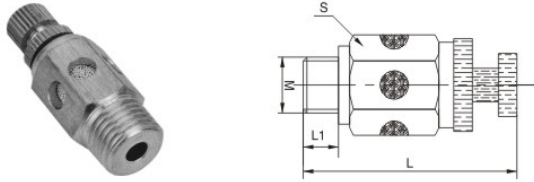

型号Model	M	L	L1	S
PSC-01	PT1/8	34.5	7.5	13
PSC-02	PT1/4	37.5	8.5	14
PSC-03	PT3/8	41.5	9.5	17
PSC-04	PT1/2	49	10.5	22

PSS 系列节流消声器


PSS Series Brass Flow Control Silencer

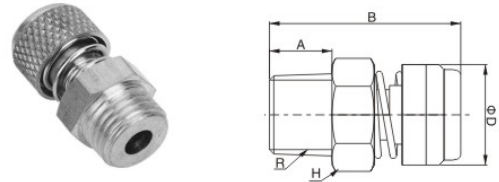

型号Model	ΦD	H	R	A	B(MAX)
PSS-01	12	12	PT1/8	7.5	30
PSS-02	15	15	PT1/4	8.5	33
PSS-03	19	19	PT3/8	9.5	38
PSS-04	19	21	PT1/2	10.5	40
PSS-06	-	-	PT3/4	-	-
PSS-10	-	-	PT1	-	-

PSL 系列塑料消声器


PSL Series Plastic Silencer

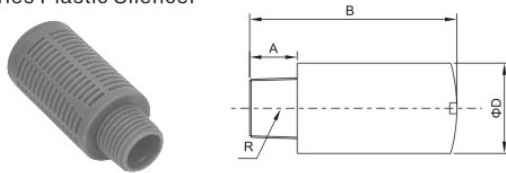

型号Model	ΦD	R	B	A
PSL-01	15.6	PT1/8	35	8
PSL-02	19	PT1/4	43.6	10
PSL-03	23.7	PT3/8	56	11
PSL-04	23.7	PT1/2	56	11

AN 系列塑料消声器


AN Series Plastic Silencer

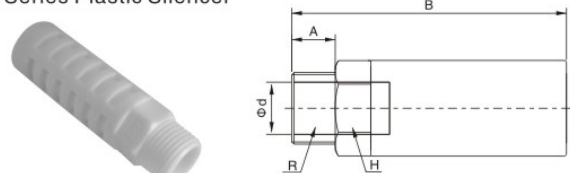

型号Model	Φd	H	R	A	B
AN-01	7	10	PT1/8	9	38
AN-02	8	14	PT1/4	10	36.4
AN-03	12	19	PT3/8	11	67
AN-04	16	22	PT1/2	14	85.5
AN-06	18	33	PT3/4	17	102

PSU 系列消声器


PSU Series Plastic Silencer

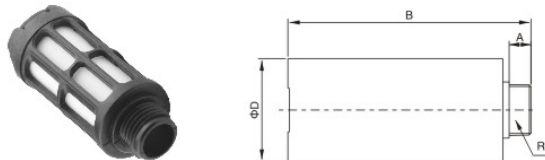

型号Model	ΦD	R	A	B
PSU-01	15	PT1/8	5	35
PSU-02	18.5	PT1/4	6	56.5
PSU-03	33	PT3/8	7	78
PSU-04	42	PT1/2	8.5	88
PSU-06	44	PT3/4	10.5	120
PSU-10	55	PT1	11	125


PSD 系列一字型消声器

PSD Series One word Silencer

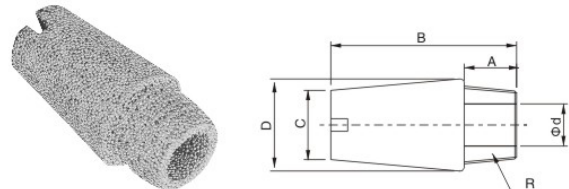

型号Model	ΦD	ΦC	Φd	R	B	A
PSD-01	11	8	5	G1/8	22	6.5
PSD-02	13	10	8.5	G1/4	25	7
PSD-03	18.5	13.5	11	G3/8	36.5	8.5
PSD-04	22.5	16	14	G1/2	43.5	10

■ 外型尺寸 Dimension

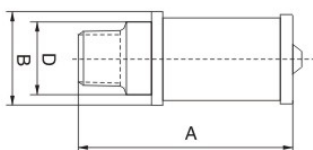

■ 技术参数 Technical Specification

适用气体Applicable gas	压缩空气 Compressed air
最高使用压力Max. service pressure Mpa	1.0
环境温度 MpaAmbient temperature °C	5-60
消音效果Muffler dB(A)	30
材质Material	铝合金外壳Aluminum alloy shell

型号Model	接管口径(*1) Pipe diameter	有效截面积 Effective cross-sectional area mm²	消音效果 Silencing effect dB(A)	最大工作压力 Maxi.working pressure Mpa
ANL500-06	R3/4	160	≥35	1
ANL600-10	R1	270	≥35	1

PS:1.Rc为内螺纹, R为外螺纹。

PS: 1. Rc is the internal thread, R is the external thread.

型号Model	接管口径(*1) Pipe diameter	A	B	D(外六角夹持面距离) (Outer hexagon clamping surface distance)
ANL500-06	R3/4	107	46	36
ANL600-10	R1	127	50	41