


Art.-Nr.: 10.05.01.00051



EMVO 25 24V-DC 3/2 NC

Solenoid valve EMVO is delivered as a ready-to-connect product.

Available accessories: venting filter

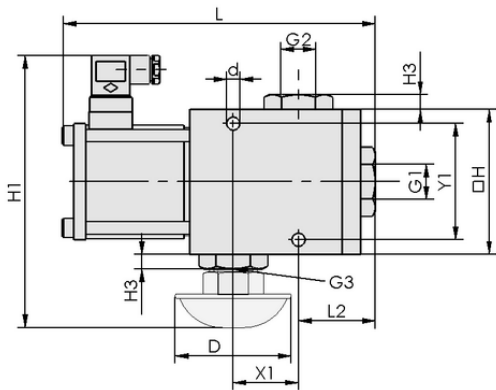

Design data EMVO 25 24V-DC 3/2 NC

Technical data

Nominal size	25.00 mm
Power consumption DC	37.0 W
Weight	5.700 kg
Voltage DC	24 V - DC
Pressure range (operating pressure) [bar]	-0.95 ... 0.00 bar
Function valve	3/2 multiway valve
Connection thread	G1"-F
Control valve	Normally closed
Nominal flow at 0.1 bar	100.500 m ³ /h

Design data

Length L2	43.00 mm
Length L	206.00 mm
Height H1	172.00 mm
Height H	100.00 mm
Outside diameter D	80.00 mm
Internal diameter d	9.00 mm
Thread G1	G1"-F
Thread G2	G1"-F
Hole spacing Y1	80.0 mm
Hole spacing X1	45.0 mm
Thread G3	G1"-F

Art.-Nr.: 10.05.01.00051

**Technical data**

Nominal size	25.00 mm
Power consumption DC	37.0 W
Weight	5.700 kg
Closing time	208.0 ms
Voltage DC	24 V - DC
Pressure range (operating pressure) [bar]	-0.95 ... 0.00 bar
Product family	EMVO
Control valve	Normally closed
Nominal flow at 0.1 bar	100.500 m³/h

**Ordering Data Accessories 10.05.01.00051**

Typ		Item number
Filter with mounting kit	FAS 80x38 G1-AG EMVP	10.05.01.00063

